
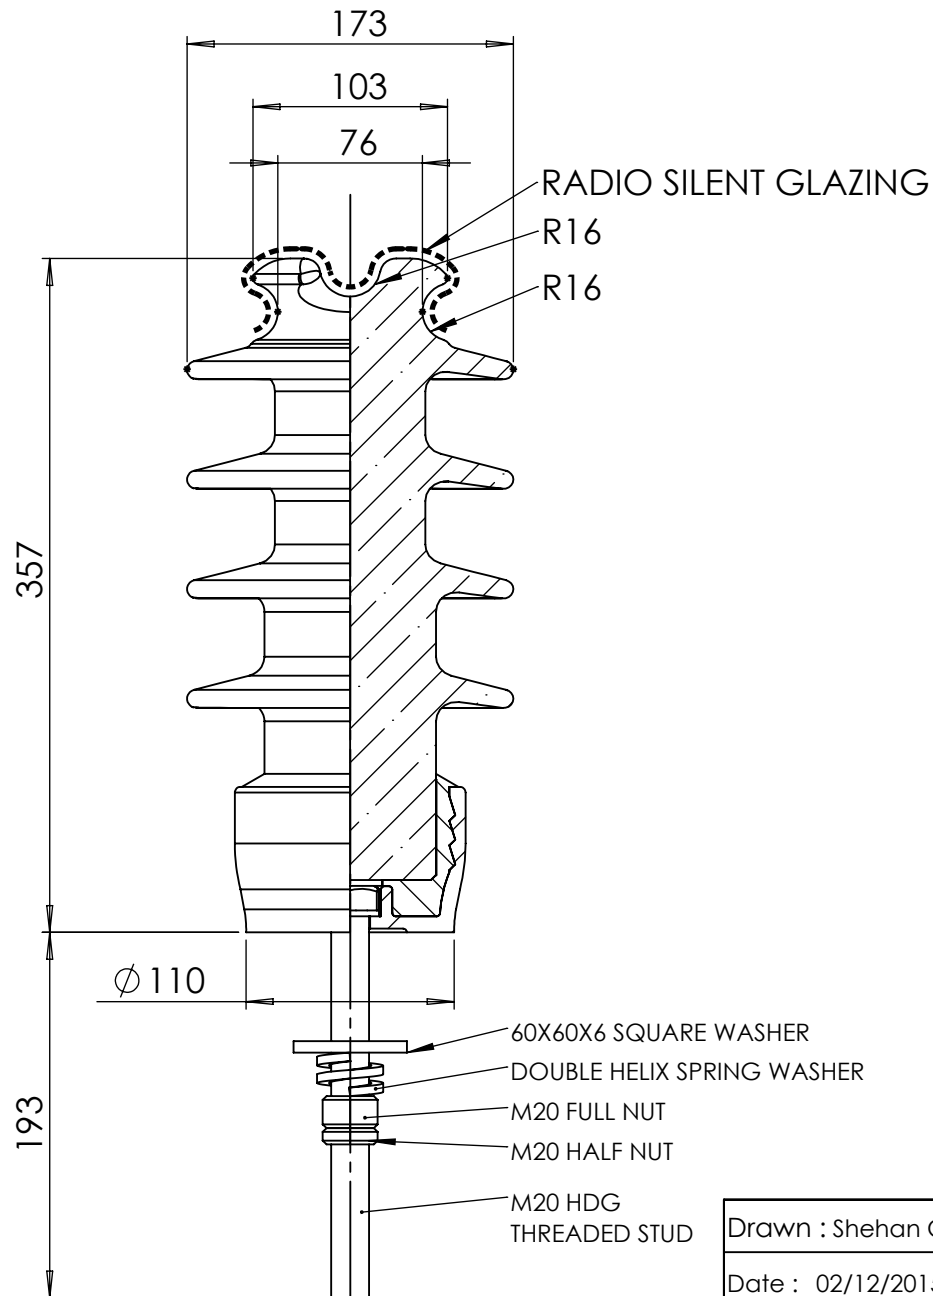


ALL DIMENSIONS IN MILLIMETRES - DO NOT SCALE - ASK IF IN DOUBT

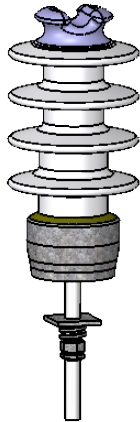

TECHNICAL SPECIFICATIONS

SYSTEM HIGHEST VOLTAGE 24 kV

WITHSTAND TEST VOLTAGES

a. Power frequency - wet (Vertical) 95 kV
b. Power frequency - dry (Horizontal) 96 kV
c. Power frequency - dry 115 kV
d. Lightning impulse - dry (Calculated) ... kV

FLASHOVER TEST VOLTAGES

a. Power frequency - wet (Vertical) 100 kV
b. Power frequency - wet (Horizontal) 110 kV
c. Power frequency - dry 125 kV

MINIMUM FAILING LOADS

a. Cantilever (Upright) 18 kN

CREEPAGE DISTANCE

a. Total creepage 490 mm
b. Protected creepage 135 mm
c. Flashover 250 mm


Gross Weight 9 kg

Pollution Performance No (ESSA Publication D (b) 19-1975) ..

H	3794	22.7.22
G	3614	3.7.14
ISSUE	MOD NO	DATE

Drawn : Shehan C

Date : 02/12/2015



New Zealand Insulators Ltd
Tel : +64-3-615 085
Fax : +64-3-615 8125
Email - sales@nzinsulators.co.nz

24 kV TIE TOP LINE POST - CLASS 2
FIXED LENGTH STUD TYPE

D632-0573/H
Part No - 464619