




NH-Latr Unt 4A 1P L8L8 1250A 1 Pole Switch

NZI Part No: 530999
Efen Part No: 33047.0010
Flat Terminal M16. For Baseplate Mounting
Also available for Busbar Contacting
NZI Part No. 530921
Efen Part No. 33048.0010

HQ & FACTORY
THOMAS STREET
PO BOX 5 TEMUKA 7948
T +64 3 615 0085

AUCKLAND SALES OFFICE
2/40 ARRENWAY DRIVE
ROSEDALE 0651
T +64 9 479 4794

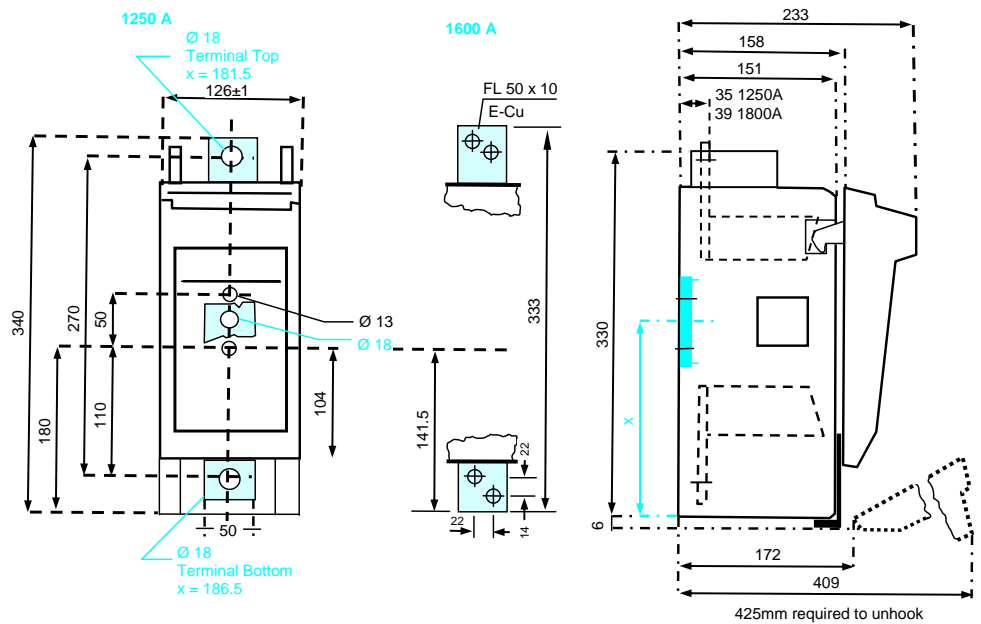

For LV fuse links acc. To DIN 43620/1 ¹	Size	00	1	2	3	4a
Rated operational current I _e	A	160	250	400	630	1250 1600 ²
Conventional free air thermal current I _{th}	A	160	250	400	630	1250 1600 ²
Rated operational voltage U _e	V	690	690	690	690	690
Rated insulation voltage U _i	V	800	800	800	800	800
Rated impulse withstand voltage U _{imp}	kV	8	8	8	8	8
Rated conditional short circuit current (When protected by fuse links)	kA	50	50	50	50	50
Weight without fuse links	Kg					
Sc version		0.38	2.4	2.4	2.5	4.2
Sb Sc version		0.36	2.0	2.0	2.4	4.2
Utilisation category IEC/EN 60 947/3	U _e = 400 V U _e = 690 V U _e = 440 V ³	AC-22B AC-21B DC-21B	AC-22B AC-21B DC-21B	AC-22B AC-21B DC-21B	AC-22B AC-21B DC-21B	AC-22B AC-21B DC-21B
Permissible ambient air temperature	°C	-40 up to 55				

¹ When using gR-Fuse-Links (VDE 0636/23), please ask for information
² 1600A possible with NH fuse links, up to a rated power dissipation of 140 W
³ Size 00 I_e = 100 A