




# NH-Latr 1NN G5G5 250A Horizontal 3P Switch

NZI Part No: 531928  
Efen Part Number : 34150.0000  
Flat Terminal M10 Top & Bottom.  
Base Plate Mounting

HQ & FACTORY  
THOMAS STREET  
PO BOX 5 TEMUKA 7948  
T +64 3 615 0085

AUCKLAND SALES OFFICE  
2/40 ARRENWAY DRIVE  
ROSDALE 0651  
T +64 9 479 4794

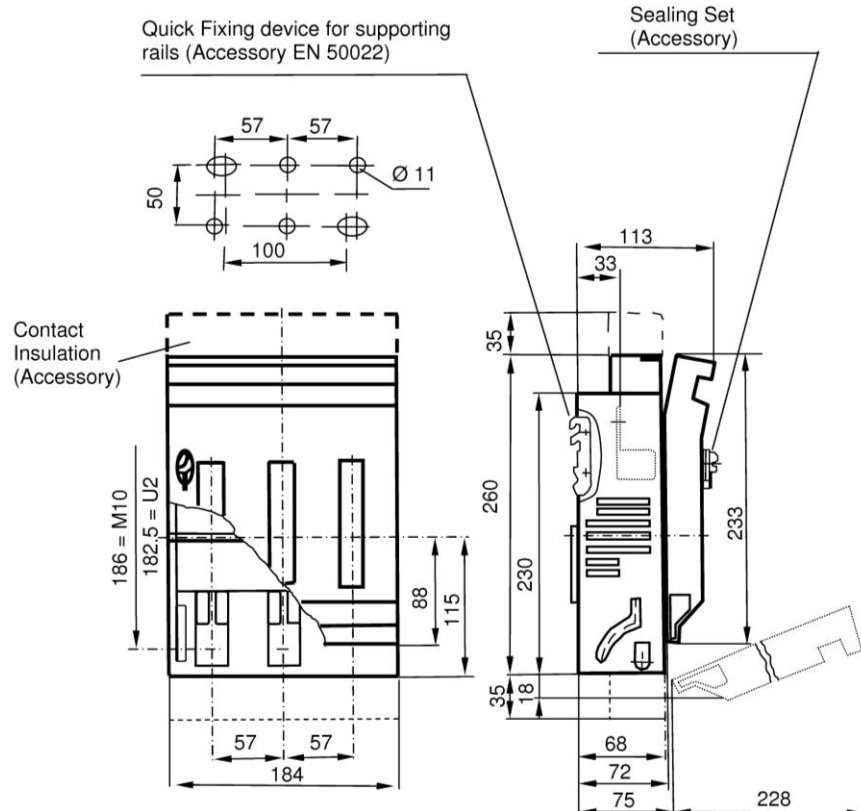

For LV fuse links acc. To DIN 43620/1 <sup>1</sup>	Size	00	1	2
Rated operational current $I_e$	A	160	250	400
Conventional free air thermal current $I_{th}$	A	160	250	400
Rated operational voltage $U_e$	V	690	690	690
Rated insulation voltage $U_i$	V	800	800	800
Rated impulse withstand voltage $U_{imp}$	kV	8	8	8
Rated conditional short circuit current (When protected by fuse links)	kA	50	50	50
Weight without fuse links	Kg	0.65	2.10	3.25
Utilisation category IEC/EN 60 947/3	$U_e = 400\text{ V}$	AC-22B	AC-22B	AC-22B
	$U_e = 690\text{ V}$	AC-21B	AC-21B	AC-21B
	$U_e = 440\text{ V}^2$	DC-21B	DC-21B	DC-21B
Permissible ambient air temperature	°C	-25 up to +55		
Mechanical Durability	Cycles	1000	1000	1000

<sup>1</sup> When using gR-Fuse-Links (VDE 0636/23), please ask for information  
<sup>2</sup> Size 00  $I_e = 100\text{ A}$